

ProFlash®



ROOF COLLARS



LEAD FREE RUBBER BOOT COLLAR

**FOR PIPE
PENETRATIONS
ON TILED ROOFS**

Roof Collars to seal pipe
penetrations up to 330mm

- ✓ Lead free – No More Heavy Lifting
- ✓ Clean for the Environment
- ✓ Safer and Toxic Free
- ✓ UV Rated / Tested
- ✓ Complies with the AS/NZS 2904: 1995
Damp Proof Courses and Flashings

SEE OVER FOR SPECIFICATIONS

CALL FOR ALL PRODUCT RANGES & SIZES

Phone: +61 3 9768 2394

Email: info@aztecau.com.au – www.aztecau.com.au

70 Logis Boulevard, Dandenong South VIC AUSTRALIA 3175



Aussie Tough. Aztec Smart.

ROOF COLLARS

ProFlash® Roof Collars are a versatile solution for a range of pitched and flat roofing applications. The sticky back allows for compatibility with a wide range of roofing materials, providing a clean, traditional appeal with a 10 Year Warranty. When ProFlash® is installed by a qualified trades person, it will form a water-tight seal on your roof that will be long lasting and complete the seal from any water leakage.

INSTALLATION BENEFITS:




- ✓ Quick installation
- ✓ Easy to dress into shape by hand or soft hammer tool
- ✓ Easy to cut with scissors or knife if required
- ✓ No health risks such as lead poisoning or risks associated with lifting heavy materials

NOTES:

- ✓ Avoid pressure load by sharp objects (eg. tile notches)

COMMON APPLICATIONS:

To seal and make water tight pipe penetrations on tiled roofs. The base material of ProFlash® Roof Collar complies with AS/NZS 2904:1995 Damp-proof courses and flashings. The ProFlash® Roof Collar exhibits great weathering and UV resistance thus guarantees the long-term performance for outdoor applications.

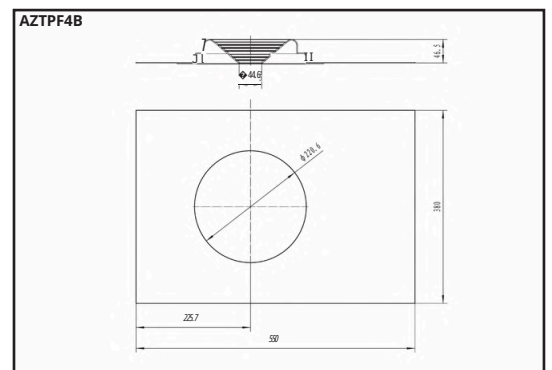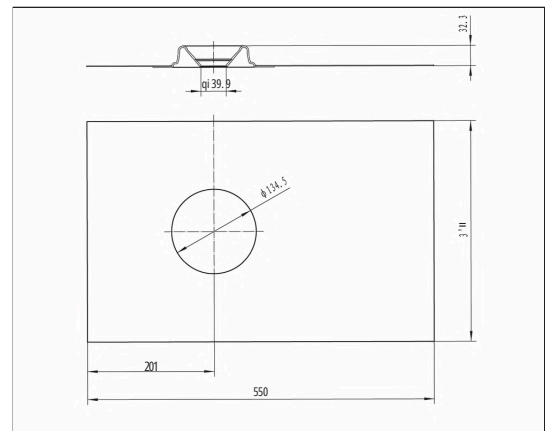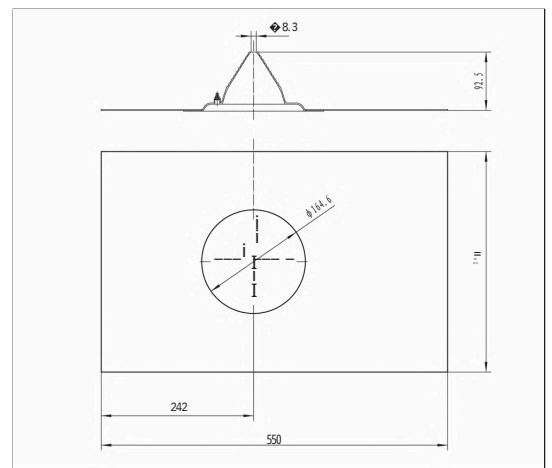

Base Material Properties		Product Range				
Thickness, mm	1.9mm ~ 2.1 mm	Product	Code	Description	Base Size 280	Boot Size 0 -
Density	1.4 ~ 1.7 g/cm ³	AZTPF1B		Aztec ProFlash® Roof Collar 0 - 50mm Black	x 450mm	50mm
Tensile strength	≥ 2 MPa	AZTPF2B		Aztec ProFlash® Roof Collar 50 - 70mm Black	350 x 550mm	50 - 70mm
Stretch ability		AZTPF3B		Aztec ProFlash® Roof Collar 12 - 125mm Black	350 x 550mm	12 - 125mm
Longitudinal	Up to 50% Up to	AZTPF4B		Aztec PProFlash® Roof Collar 50 - 170mm Black	380 x 550mm	50 - 170mm
Transverse	15%	AZTPF5B		Aztec ProFlash® Roof Collar 170 - 330mm Black	600 x 850mm	170 - 330mm
Service Temperature	-40 °C to +100°C					

WWW.AZTECAU.COM.AU

CALL FOR ALL PRODUCT RANGES & SIZES

Phone: +61 3 9768 2394

Email: info@aztecau.com.au – www.aztecau.com.au

70 Logis Boulevard, Dandenong South VIC AUSTRALIA 3175